


Spring Motor Assemblies

NEG'ATOR

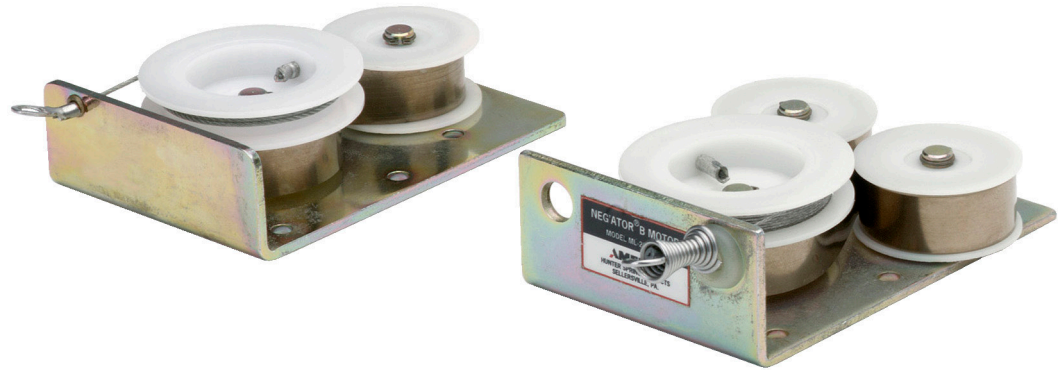

Cable Tension (lbs)	Length (in)	No. of Turns	Fatigue Life (min)	Cable Type	Part Number Spec Number
0.375	36	20	3,000	0.15" diam. nylon monofilament (15 lb. test)	ML-1448 196560
1.0	72	15	7,500	.024" dia. uncoated stainless steel	ML-2917 196565
2.0	72	15	2,500	.024" dia. uncoated stainless steel	ML-2918 196570
3.0	72	15	4,500	.024" dia. uncoated stainless steel	ML-2919 196575
3.1	273	45	15,000	.031" dia. 3x7 hi-yield galv. steel aircraft cable coated to .047" dia with nylon	ML-2492 193280
4.0	72	15	2,500	.024" dia. uncoated stainless steel	ML-2920 196580
5.0	235	40	9,000	.031" dia. 3x7 hi-yield galv. steel aircraft cable coated to .047" dia with nylon	ML-2490 193275
5.0	72	15	2,000	.031" dia. 3x7 hi-yield galv. steel aircraft cable coated to .047" dia with nylon	ML-2921 196585
7.5	42	8	6,000	.031" dia. 3x7 hi-yield galv. steel aircraft cable coated to .047" dia with nylon	ML-2476 193225
7.5	207	36	6,000	.031" dia. 3x7 hi-yield galv. steel aircraft cable coated to .047" dia with nylon	ML-2488 193270
10.0	37	7	5,000	.031" dia. 3x7 hi-yield galv. steel aircraft cable coated to .047" dia with nylon	ML-2478 193230
10.0	184	33	4,000	.031" dia. 3x7 hi-yield galv. steel aircraft cable coated to .047" dia with nylon	ML-2486 193260
13.5	160	29	2,500	.031" dia. 3x7 hi-yield galv. steel aircraft cable coated to .047" dia with nylon	ML-2484 193250
15.0	33	6	2,500	.031" dia. 3x7 hi-yield galv. steel aircraft cable coated to .047" dia with nylon	ML-2480 193235
15.0	160	29	2,000	.031" dia. 3x7 hi-yield galv. steel aircraft cable coated to .047" dia with nylon	ML-2482 193242